For Truly Technical Constructions...!










Technical Specifications

Model	:	M6TM
Туре	:	Hydrostatic Transmission with Oil Cooler
Volumetric Capacity		
(Geometric)	:	11900 Ltrs.
Water Line	:	7200 Ltrs.
Rotation Speed	:	0 – 14 RPM
Filling Ratio	:	50.4 %
Filling Capacity Without Flap	:	6 Cbm
Water Tank Capacity	:	600 Ltrs.
Water Pump Capacity	:	400 Ltrs. / Min. At 3.5 Bar Pressure.
Drum Width (Maximum)	:	2300 mm
Drum (Material of Construction)	:	ST-52-3
Drum angle	:	13 Deg.
Tare	:	3950 kgs.
Driven By	:	Kirloskar Air Cooled Diesel Engine Model 494
Mounting On	:	Ashok Leyland Taurus / Tata 2516 OR any other equivalent Truck Chasis.

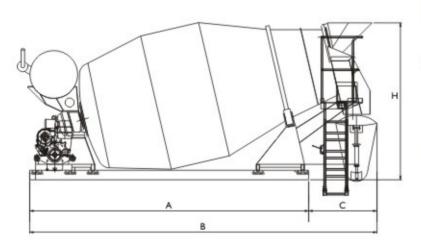

Salient Features

- Operation is user-friendly.
- Excellent quality of materials and components gives long life with less economy.
- The design of devices allow concrete consistently with high speed.
- Constant discharges of concrete.
- High mixing capacity and maximum discharge output thanks to the optimal position of the spiral blades in the drum.
- Harden rollers increase the reliability of the performance. Cover provides safety and protection against dirt.
- Fully imported oil bath planetary gear system is proven when traveling in rough terrain with full power of the engine required.
- The drum and spirals are made of highly wear resistant steel so that it increases stability and reduces the wear out.
- More Economic in transporting concrete thanks to MACONS larger volume of drum with more water line capacity.
- Fully Imported Hydraulic Pump, Motor and Oil Cooler.
- Efficient and reliable after sale-service, round the clock.

Dimensions:

A - frame length	mm	4805
B - max. length	mm	5955
C - overhange	mm	1150
H - max. height	mm	2630
Max width	mm	2300
Total weight (empty)	kg	3950

MACONS EQUIPMENTS

(Formerly known as M/s. Maxocrete Equipments)

Plot No. 37/C, Phase-I, G.I.D.C. Estate, Vatva, Ahmedabad-382 445 Gujarat-INDIA.

Ph.: 0091+79+25894558/25891510/25896184/65438746

Fax: 0091+79+25892097 E-Mail: info@macons.co.in Website: www.macons.co.in